

PHYSICS

# Chance Discovery May Yield Metal-Plating Method

## "Electron Camera" Shows How Zinc Particles Dissolve Into Liquid Surface Layer of Polished Copper

THE DISCOVERY that the surface of polished metal is liquid promises to lead to a new method of metallic plating. This advance may result from a few seconds of startled watching of the picture thrown on a screen by an "electron microscope."

In a few fleeting moments, Prof. G. I. Finch and two young research students, Dr. A. G. Quarrell and J. S. Roebuck, at the Imperial College of Science, London, found definite proof of a hypothesis put forward many years ago by the late Sir George Beilby, the director of fuel research for the British Government during the World War.

Prof. Finch and his colleagues were working with a special type of science's new instrument called the electron-diffraction camera. This wonderful "camera," in which a stream of electrons throws an image on a fluorescent screen, in effect magnifies the object 30,000,000,000 times, compared with the 2,500 or 3,000 times of ordinary microscopes.

They were experimenting with a piece of polished copper which was being bombarded with particles of zinc emitted from a zinc wire rapidly heated in a vacuum by an electric current. Many times before similar experiments had been made, the scientists studying the shapes of crystals thus deposited on metal surfaces. But this happened to be the first time that the bombarded metal had been polished.

As usual a diffraction pattern was shown on the fluorescent screen—a score or more of bright circles. But to the intense surprise of the watchers this pattern gradually weakened, became less bright and within three seconds had completely disappeared. They tried again. A second, a third and a fourth film of zinc was projected onto the copper. Each disappeared in the same way as the first, but each diffraction pattern lasted longer than the preceding one, until the twelfth pattern remained—meaning that the twelfth layer had stood fast.

"What this means," Prof. Finch told

the Science Service correspondent, "is that the incoming crystals of zinc were being dissolved in the liquid layer of the polished copper. Like snowflakes falling on water, the crystals rest for a moment on the surface and then disappear.

"That this should happen at all is presumptive evidence that the top layer of the polished metal is liquid. But the real proof is that with this experiment we can only observe an electron pattern when the zinc crystals are on the top of the liquid surface, and not before they arrive or after they have disappeared. No pattern means no crystals—which is what physicists call the solid liquid' state.

"The twelfth layer of crystals standing fast simply means that the liquid copper has reached its saturation point, has dissolved all the zinc that it is capable of holding. This is supported by the fact that when the zinc bombardment was turned on polished iron the zinc layer stood fast at only the second attempt. Zinc is less soluble in iron than in copper, and so one would ex-


METEOROLOGY

# Stratosphere Under Heavy Attack by Scientists

STRATOSPHERE weather secrets are being subjected to barrage attack by scientists of many countries.

In the United States and from a number of points in Europe sounding balloons are being released every day during January to carry instruments high into the rarefied atmosphere.

And now Director Carl G. Rossby of the Massachusetts Institute of Technology meteorological laboratory has announced an even more concentrated assault. Within the next few weeks, when conditions for this special study are right, forty balloons will be released

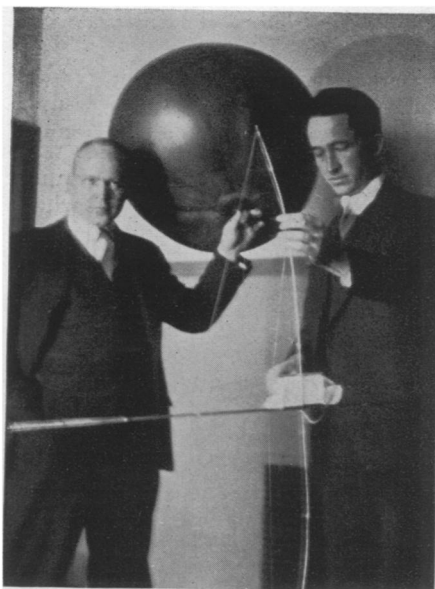

STRATOSPHERE CRAFT

Dr. Rossby, left, is holding the balloon which will carry into the stratosphere the bamboo frame and meteorological instruments held by Dr. Bjerknes. The delicate instruments are in the white container.

pect the liquid layer of iron to be saturated more quickly."

Prof. Finch has found that the films of zinc or other substances thus deposited on polished metal can never be completely removed without removing the metal itself. An alloy has, in fact, been formed. This process, which he terms "vacuum-plating," has, he believes, great commercial possibilities as a substitute for electroplating. A systematic investigation is now being started.

Science News Letter, February 3, 1934

from St. Louis at intervals of about two hours. The meteorological airplane of the Massachusetts Institute of Technology will make observations to 17,000 feet at the same time.

The balloons when inflated measure four feet in diameter. Each carries specially designed instruments weighing only a few ounces which automatically record temperature, humidity and atmospheric pressure. They will finally burst and the instruments do a parachute drop to earth, in shock-absorbing frames made of split bamboo. Each set of instruments bears an identification tag

offering a five-dollar reward for its safe return.

Dr. J. Bjerknes, prominent Norwegian meteorologist who is now visiting the Massachusetts Institute of Technology, will cooperate at Cambridge with Dr. Hurd C. Willett of the Institute staff in making the forecasts upon which the release of the balloons will depend. A mid-continent location was chosen for the experiments so that the balloons will not be lost over the ocean.

The daily stratosphere soundings are being made from Omaha, Nebr., by the U. S. Weather Bureau in cooperation with the International Upper Air Commission. Data gathered by all countries engaged in the research are to be published by the Commission so that the results may be readily studied by meteorologists everywhere, L. T. Samuels of the Aerological Division of the Weather Bureau explained.

The barograph used by the Weather Bureau descends to the earth slowly beneath a parachute that opens after the balloon bursts. The balloons usually rise about eleven miles or more, and have been known to reach an altitude of twenty miles. Most of the returned instruments are found within fifty miles of the take-off, though some have been sent in from distances of several hundred miles.

*Science News Letter, February 3, 1934*

#### ASTRONOMY

## Stellar Looking-Glass Slowly Cooling

**A** HUGE looking-glass for the stars which will eventually serve science in the 80-inch reflecting telescope of the new McDonald Observatory, in Texas, is now slowly cooling in the Corning Glass Works, Corning, N. Y.

Its temperature is dropping two to four degrees a day from the high heat that the molten glass had when it was poured. In about three months the huge disc, a foot thick, nearly seven feet in diameter, weight 5,600 pounds, will be ready for shipment to Cleveland where experts of Warner & Swasey Co. will spend from one to two years grinding its face into a very precise concave optical shape.

McDonald Observatory, whose chief telescope will have this 80-inch mirror, is being erected on Mt. Locke in the Davis Mountains of Texas. It will be operated jointly by the University of Texas and the University of Chicago.

*Science News Letter, February 3, 1934*

#### AVIATION

# Superiority Predicted For Rotating Wing Aircraft

## Research Will Make Autogiro and Gyroplane Faster Than Conventional Airplane, N. A. C. A. Engineer Believes

**F**LYING machines with rotating wings will be superior to the conventional airplane as soon as their possibilities for high speed are practically developed, John B. Wheatley, aeronautical engineer of the National Advisory Committee for Aeronautics, predicted to the Society of Automotive Engineers.

The autogiro and the gyroplane are the two types of rotating-wing aircraft which, according to Mr. Wheatley's analysis, have the possibilities of becoming superior to the conventional type of fixed wing airplane now widely used. The reason for the pronounced possibility of the autogiro and the gyroplane is the inherent ability of their rotors or moving wings to attain their maximum lift-drag ratio at any desired forward speed.

The novel cyclogiro, with the paddle-wheel wings, is rated by Mr. Wheatley as being approximately equal in merit to the airplane, while the helicopter is definitely inferior.

The autogiro is the best known of all rotating-wing aircraft. It was invented by Juan de la Cierva, and the American version of the autogiro which has been flown extensively in this country was produced by Harold F. Pitcairn, working with the Spanish inventor.

### Gyroplane

The gyroplane is sponsored by E. Burke Wilford of Philadelphia. The autogiro and the gyroplane present a very similar appearance with blades that rotate freely under the action of air forces about a vertical axis, replacing to a large extent the conventional wings of the airplane. Mr. Wheatley explains that the aerodynamical principles of the autogiro and gyroplane are practically identical and that their differences are largely structural.

"The low-speed control is superior to that of the airplane," Mr. Wheatley said in reference to the autogiro and the gyroplane. "The reliability is equivalent to that of an airplane, and emergency landing will be easier. The low-

speed performance is superior to that of an airplane. Airplane high speeds will probably be exceeded. Control system is as simple and easy to use as that of the airplane. First cost will be slightly higher, but maintenance and operating costs will be equivalent to that of airplane."

The rotating-wing type of machine is likely to be used by the private flyer and the unskilled pilot because of its increased safety and the smaller landing field required for it, Mr. Wheatley emphasized. Almost all the hazards encountered in flying an airplane are connected with the phenomenon of a gradual weakening of control as the flying speed approaches its minimum, he explained. As minimum speeds range from 50 to 75 m.p.h. an undesirable premium is placed upon piloting technic during landings and take-offs. A rotating-wing aircraft suffers very slightly from these handicaps because the relative velocity of the lifting surfaces to the air is independent of the translatory velocity of the machine and is always large, so that the angle of attack of the lifting surfaces is well below the burble point. The resultant performance of rotating-wing aircraft thus materially extends downward the low-speed phase of flight, lessening the piloting skill required for emergency landings and take-offs, and making the pilot more independent of meteorological conditions because at low speed a shorter visibility is required for the same safety.

### Cyclogiro

The cyclogiro, which Mr. Wheatley rates as being approximately equal in merit to the airplane, is of such recent origin that it has not yet been demonstrated at full scale. It consists of a fuselage of conventional form, supported in the air by power-driven paddle-wheel wings, one on each side. The paddle-wheel rotors perform the functions of both the wings and the propeller of the conventional airplane.

*Science News Letter, February 3, 1934*